


## ABACO DI PLASTICITA' DI CASAGRANDE

Committente:

Cantiere:

N° d'ordine	Rif. interno	Sond.	Camp.	Profondità		Limite liquido	Indice plastico	Colore simbolo
1	153-06	B	C4	21,50	22,00	50,0	10,0	●
2	154-06	A	C1	12,00	12,20	78,0	45,0	▲
3	155-06	4	3	1,00	1,50	25,0	13,0	■
4	156-06	2	1	24,30	24,80	80,0	35,0	○
5	157-06	Q	5	12,00	12,50	35,0	24,0	▲
6	158-06	F	6	15,00	15,20	27,0	5,0	■
7	159-06	G	7	18,00	18,40	70,0	50,0	●
8	160-06	8	1	20,00	20,30	75,0	40,0	▲
9	161-06	9	1	12,00	12,50	35,0	11,0	■
10	162-06	10	2	17,00	17,20	45,0	22,0	●
11	163-06	12	A	20,00	21,50	32,0	6,0	▲
12	164-06	5	5	21,00	21,30	30,0	9,0	■
13	165-06	4	2	2,00	2,20	28,0	11,0	○
14	166-06	T	1	1,50	1,80	80,0	45,0	▲
15	167-06	G	2	2,15	3,00	56,0	28,0	■

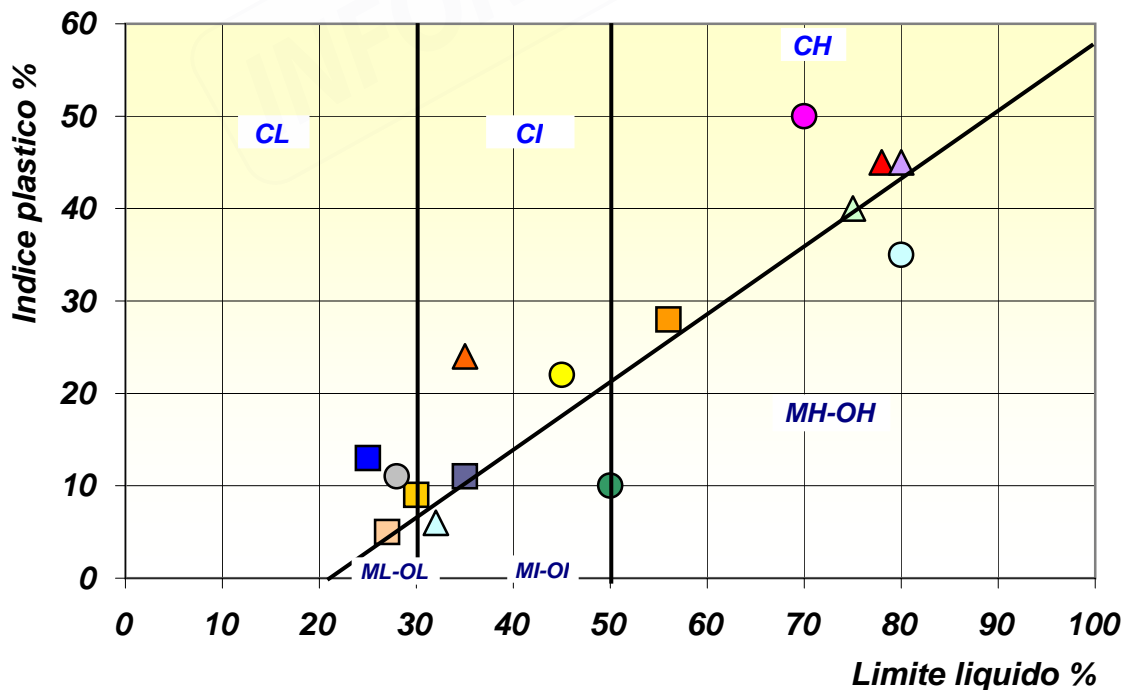

$I.P. = 0,73 \times (L.L. - 20)$

C - Argille inorganiche  
M - Limi inorganici  
O - Argille e limi organici

L - Bassa compressibilità  
I - Media compressibilità  
H - Alta compressibilità